



Monitoring Multinomial Logit Profiles Via Log-Linear Models

R. Noorossana^{*}, A. Saghaei, H. Izadbakhsh & O. Aghababaei

Rassoul Noorossana, Industrial Engineering Department, Iran University of Science and Technology, rassoul@iust.ac.ir

Abbas Saghaei, Industrial Engineering Department, Islamic Azad University, Science and Research Branch, a.saghaei@srbiau.ac.ir

Hamid Izadbakhsh, Industrial Engineering Department, Iran University of Science and Technology Tehran, Iran, hizadbakhsh@iust.ac.ir

Omid Aghababaei, Statistics Department, Faculty of Mathematical Sciences, Shahid Beheshti University, Tehran, Iran

KEYWORDS

Loglinear Models,
Average Run Length (ARL),
Multivariate Exponentially
Weighted Moving Average
(MEWMA),
Multinomial Logit Regression,
Profile Monitoring

ABSTRACT

In certain statistical process control applications, quality of a process or product can be characterized by a function commonly referred to as profile. Some of the potential applications of profile monitoring are cases where quality characteristic of interest is modelled using binary, multinomial or ordinal variables. In this paper, profiles with multinomial response are studied. For this purpose, multinomial logit regression (MLR) is considered as the basis. Then, the MLR is converted to Poisson GLM with log link. Two methods including Multivariate exponentially weighted moving average (MEWMA) statistics, and Likelihood ratio test (LRT) statistics are proposed to monitor MLR profiles in phase II. Performances of these three methods are evaluated by average run length criterion (ARL). A case study from alloy fasteners manufacturing process is used to illustrate the implementation of the proposed approach. Results indicate satisfactory performance for the proposed method.

© 2013 IUST Publication, IJIEPR, Vol. 24, No. 2, All Rights Reserved.

1. Introduction

In the last 2 decades, the control charts for cases, in which the quality of a process or product is characterized by a function between two or more variables, are developing both in theory and application. So far, several investigations have been studied on various types of this function, which called "profile", including linear and nonlinear profiles. In addition, profile monitoring has been applied in some real applications such as automotive [1], piece manufacturing [2, 3], Calibration [4], Tourism [5], Economy [6], and Charging and loading process [7]. Many authors including [8-16] worked on linear

profiles. Multiple and polynomial linear profile are considered by [1, 17-21]. Ref. [22-27] studied nonlinear profile models. Multivariate linear profiles are investigated by [4, 7, 28, 29]. For more details, see Noorossana et al. [30].

The continuity of the response variables is assumed in all aforementioned researches. However, in many applications the response variables could be binary, multinomial or ordinal. These situations are the most well-known especial cases of general linear models (GLMs) family and often model with logistic regression. Binary logistic profile was studied by [2, 31] Phase I and Phase II, respectively. Noorossana and Izadbakhsh [3] investigated multinomial logistic profile in Phase I and this profile in Phase II was investigated by Noorossana et al. [32]. Izadbakhsh et al. in [33] studied ordinal logistic profile in Phase II for tourism case studies. Noorossana and Izadbakhsh discussed [34] ordinal logistic profile in Phase I.

^{*} Corresponding author: Rassoul Noorossana

Email: rassoul@iust.ac.ir

Paper first received Jan. 28, 2013, and in accepted form Feb. 19, 2013.

Our focus in this paper is to study multinomial logistic profiles and to propose two methods in Phase II including MEWMA, and LRT. Using Poisson GLM with log link instead of multinomial logistic is the novelty of this paper. Hence, estimating the coefficients became easier and more accurate. Moreover, monitoring the strength of alloy fastener as a case study is presented. To evaluate the performances of the proposed methods, average run length (ARL) measure is used.

The reminder of this paper is organized as follows. In Section 2, the multinomial logistic regression model and the methods used to estimate its parameters are discussed. MEWMA and LRT methods are presented in Section 3. In Section 4, the performance of the two profile monitoring approaches are evaluated based on data from the case study. Our concluding remarks are provided in the Section 4.

2. Multinomial Logistic Regression

There are two types of response variables, continues and discrete. The discrete variables divided in to counts variables and categorical variables. Multinomial, ordinal and binary are the three sub categories of categorical variables. This concept is demonstrated in Figure 1. Multinomial response variable is considered in this paper. The major difference between multinomial and ordinal is that the multinomial variables do not have any natural order. In other words, if response variable has more than two levels it may have ordered nature, such as weak, moderate, and good, or it may have unordered nature, such as product categories.

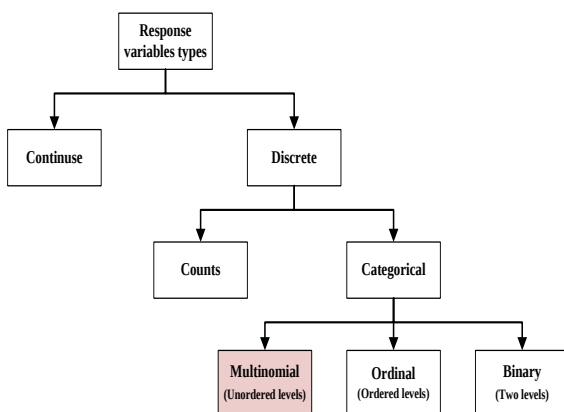


Fig. 1. Types of Response Variables [35]

Consider a multinomial response variable with k - categorical levels and a p -dimensional vector of covariate variables denoted by $\mathbf{X}$. For multinomial logistic regression modelling, it is very common to consider the 1th level as the basic level and to calculate other levels based on this base. In other words, multinomial logistic regression model could be defined by [36]:

$$\frac{\pi_{ij}}{\pi_{i1}} = \exp(\boldsymbol{\beta}_j' \mathbf{x}_i), i = 1, \dots, n \quad j = 1, \dots, k \quad (1)$$

where, n is the number of covariate's settings, $\boldsymbol{\beta}_1 = \mathbf{0}$

and $\pi_{ij} = \Pr(y_i = j) = \Pr(y_{ij}) \forall i = 1, \dots, n \quad j = 1, \dots, k$.

These equations are known as logit links and since,

$\pi_{i1} = 1 - \sum_{j=2}^k \pi_{ij}$, we would have $k - 1$ logit equations.

There are other links such as probit or log-log in literature, however the logit link is more common. Moreover, It could be shown easily that:

$$\pi_{ij} = \frac{\exp(\boldsymbol{\beta}_j' \mathbf{x}_i)}{\sum_{j=1}^k \exp(\boldsymbol{\beta}_j' \mathbf{x}_i)} = \frac{\exp(\eta_{ij})}{\sum_{j=1}^k \exp(\eta_{ij})}, j = 1, \dots, k \quad (2)$$

where, $\eta_{ij} = \boldsymbol{\beta}_j' \mathbf{x}_i$.

Let consider $(y_{i1t}, \dots, y_{kit}, \mathbf{x}_{it})$ be the t^{th} profile sample that are shown in the following form:

Explanatory Variables (i)	Response Category (j)			Totals
	1	...	k	
$\mathbf{X}_1$	y_{11t}	...	y_{1kt}	m_{1t}
$\mathbf{X}_2$	y_{21t}	...	y_{2kt}	m_{2t}
...	...	...	...	...
$\mathbf{X}_n$	y_{n1t}	...	y_{nkt}	m_{nt}

Consider y_{ijt} as independently Poisson variable with

mean λ_{ijt} , As $\sum_{j=1}^k y_{ijt}$ is Poisson with mean $\sum_{j=1}^k \lambda_{ijt}$ it

could be shown easily that the conditional distribution

of the y_{ijt} given total counts $\sum_{j=1}^k y_{ijt}$ is multinomial.

In other words, the likelihood associated with multinomial observations is the same as the likelihood associated with Poisson GLM with log link which are constrained by a fixed total.

Formally, if we define $\lambda_{ijt} = \lambda_{ijt} \exp(\boldsymbol{\beta}_j' \mathbf{x}_i)$, the log-linear model could be as:

$$\begin{aligned} \log \lambda_{ijt} &= \log \lambda_{ijt} + \boldsymbol{\beta}_j' \mathbf{x}_i \\ &= \log(\phi_{it}) + \boldsymbol{\beta}_j' \mathbf{x}_i \end{aligned} \quad (3)$$

Estimating the parameters (ϕ_{it}, β_{jt}) is done using a two-stage log likelihood maximization with the following steps (Algorithm 1).

Step 1: Consider log likelihood as:

$$l(\phi_{it}, \beta_{jt}) = \sum_{i=1}^n \sum_{j=1}^k (-\lambda_{ijt} + y_{ijt} \log \lambda_{ijt}) \quad (4)$$

Step 2: Maximize Equation (4) based on ϕ_{it} .

So,

$$\frac{\partial l}{\partial \phi_{it}} = \sum_{j=1}^k \left(-\exp(\beta_{jt}' \mathbf{x}_i) + \frac{y_{ijt}}{\phi_{it}} \right) \quad (5)$$

and $\hat{\phi}_{it}$ could be estimated using:

$$\hat{\phi}_{it} = \frac{\sum_{j=1}^k y_{ijt}}{\sum_{j=1}^k \exp(\beta_{jt}' \mathbf{x}_i)} \quad (6)$$

Step 3: Maximize Equation (4) based on β_{jt} .

To do so, consider ϕ_{it} as fixed and to converge more rapidly, without loss of generality, consider the log likelihood for each category level as:

$$l_j(\beta_{jt}) = \sum_{i=1}^n \left(-\phi_{it} \exp(\beta_{jt}' \mathbf{x}_i) + y_{ijt} (\log \phi_{it} + \beta_{jt}' \mathbf{x}_i) \right) \quad (7)$$

So, the first and the second derivative of Equation (7) are:

$$\frac{\partial l}{\partial \beta_{jt}} = \sum_{i=1}^n \left(-\phi_{it} \mathbf{x}_i \exp(\beta_{jt}' \mathbf{x}_i) + y_{ijt} \mathbf{x}_i \right)$$

$$\frac{\partial^2 l}{\partial \beta_{jt}^2} = \sum_{i=1}^n \left(-\phi_{it} \mathbf{x}_i^2 \exp(\beta_{jt}' \mathbf{x}_i) \right)$$

Step 4: Calculate the new estimate of β_{jt} based on Newton-Raphson method.

Step 5: After fitting models to each category in step 4, new estimate of ϕ_{it} is calculate using step 2.

3. Multinomial Logistic Profiles Monitoring MEWMA Approach

In order to monitor $\hat{\xi}_t = (\hat{\phi}_{it}, \hat{\beta}_{jt})$, we use MEWMA control chart which is proposed by [34]:

$$Z_{t,\xi} = \theta(\hat{\xi}_t - \xi) + (1-\theta)Z_{(t-1),\xi} \quad (8)$$

where $\theta(0 < \theta < 1)$ is a smoothing parameter. When the process is in-control $Z_{t,\xi}$ has mean vector zero and covariance matrix $\Sigma_{Z_{t,\xi}} = \left(\frac{\theta}{2-\theta} \right) \Sigma_{\xi_t}$. Based on these assumptions, $T_{Z_{t,\xi}}^2$, the monitoring statistic, is given by:

$$T_{Z_{t,\xi}}^2 = Z_{t,\xi} \Sigma_{t,\xi}^{-1} Z_{t,\xi}' \quad (9)$$

Obviously, the process is in-control when $T_{Z_{t,\xi}}^2 \leq h_M$. h_M is obtained by using a Monte Carlo simulation.

4. The LRT Approach

According to Agresti (2003), likelihood ratio test (LRT) is a common test to evaluate goodness of fit test in generalized linear models (GLMs) literature. In the LRT approach, the ratio of maximum likelihoods based on the reference and estimated models are compared. If $\hat{\xi}_t = (\hat{\phi}_{it}, \hat{\beta}_{jt})$, denotes the maximum likelihood estimates which is obtained by Algorithm 1 for the model parameters vector, $\xi_t = (\phi_{it}, \beta_{jt})$, then the two log-likelihood functions can be defined as:

$$l(\phi_{it}, \beta_{jt}; y_{ijt}) = \sum_{i=1}^n \sum_{j=1}^k (-\lambda_{ijt} + y_{ijt} \log \lambda_{ijt}) \quad (10)$$

$$l(\hat{\phi}_{it}, \hat{\beta}_{jt}; y_{ijt}) = \sum_{i=1}^n \sum_{j=1}^k (-\hat{\lambda}_{ijt} + y_{ijt} \log \hat{\lambda}_{ijt}) \quad (11)$$

By using equations (10) and (11), the proposed control chart uses the following statistic:

$$\lambda_t = 2 \left(\log L(\hat{\xi}_t; \mathbf{y}_t) - \log L(\xi_t; \mathbf{y}_t) \right) \quad (12)$$

This statistic, which is usually referred to as deviance, follows an approximate chi-square distribution with r degrees of freedom. r is equal to the difference in the degrees of freedom of the reference model and the estimated model. Therefore, the recommended upper control limit for this chart would be $\chi_{\alpha r}^2$. It is obvious that large values of λ_t indicate the out-of-control conditions.

5. The Case Study

The compressive strength of an alloy fastener that used in many applications such as aircraft construction is a very important quality characteristic. For controlling this characteristic, we have to control the strength for different loadings as measured in pounds per square inch (psi). This is the certain type of profile. The state of alloy fasteners when testing with certain load is denoted by response variable. In this case, the response variable has three levels, major defect, minor defect, and no defect. The covariate variable (x) is the loading strength. Based on historical data, the model is defined as follows:

$$\begin{cases} \log\left(\frac{\pi_{i1}}{\pi_{i3}}\right) = 2 + \log(x_i) \\ \log\left(\frac{\pi_{i2}}{\pi_{i3}}\right) = 1.5 + 2\log(x_i) \end{cases} \quad (13)$$

where, π_1, π_2 , and π_3 are the probability of having major, minor, or no defect in certain loads including $x_i = \{2500, 2700, \dots, 4300\}$

The two approaches are simulated for 10,000 times and the results are compared by using average run length (ARL). The in-control ARL (ARL_0) of 200 is very common among different statistical process control schemes. Hence, the control limits are set to gain $ARL_0 = 200$. We, then evaluate the performance of the approaches by considering shifts in the parameters as a multiple of the parameter standard deviation such as $\beta_{11} + \lambda\sigma_{\beta_{11}}$. Table 1 and Table 2 show the ARL values for different shifts in the parameters of the proposed approaches for $n=30$ and $n=100$.

Tab. 1. ARL values for $n=30$ for Alloy Fastener

	λ	0	1	2	3	4	5	6	7	8	9
β_{21} shifts to	MEWMA	198.0	24.03	7.36	4.27	3.08	2.44	2.09	1.87	1.70	1.47
$\beta_{21} + \lambda\sigma_{\beta_{21}}$	LRT	199.5	101.41	28.63	9.27	3.76	1.98	1.34	1.11	1.03	1.01
β_{31} shifts to	MEWMA	198.0	55.85	10.84	5.31	3.63	2.78	2.30	2.04	1.93	1.76
$\beta_{31} + \lambda\sigma_{\beta_{31}}$	LRT	199.5	105.18	30.80	8.89	3.45	1.84	1.24	1.05	1.00	1.00
β_{22} shifts to	MEWMA	198.0	57.60	12.15	6.13	4.13	3.11	2.56	2.21	1.99	1.86
$\beta_{22} + \lambda\sigma_{\beta_{22}}$	LRT	199.5	121.10	43.48	15.51	6.60	3.25	1.97	1.43	1.17	1.07
β_{32} shifts to	MEWMA	198.0	29.68	10.38	5.98	4.19	3.30	2.71	2.34	2.09	1.89
$\beta_{32} + \lambda\sigma_{\beta_{32}}$	LRT	199.5	136.98	66.90	32.82	16.19	8.89	5.32	3.63	2.63	1.99

Tab. 2. ARL values for $n = 100$ for Alloy Fastener

	λ	0	1	2	3	4	5	6	7	8	9
β_{21} shifts to	MEWMA	198.0	20.18	6.49	3.87	2.79	2.25	1.98	1.78	1.52	1.27
$\beta_{21} + \lambda\sigma_{\beta_{21}}$	LRT	201.0	97.06	26.35	8.02	3.13	1.72	1.23	1.06	1.01	1.00
β_{31} shifts to	MEWMA	198.0	32.18	8.24	4.49	3.18	2.48	2.11	1.92	1.76	1.47
$\beta_{31} + \lambda\sigma_{\beta_{31}}$	LRT	201.0	101.41	28.63	9.27	3.76	1.98	1.34	1.11	1.03	1.01
β_{22} shifts to	MEWMA	198.0	39.12	9.90	5.29	3.63	2.83	2.34	2.07	1.90	1.75
$\beta_{22} + \lambda\sigma_{\beta_{22}}$	LRT	201.0	118.96	41.30	14.30	5.80	2.89	1.75	1.30	1.12	1.03
β_{32} shifts to	MEWMA	198.0	30.64	10.07	5.68	3.99	3.11	2.59	2.24	2.01	1.83
$\beta_{32} + \lambda\sigma_{\beta_{32}}$	LRT	201.0	162.38	95.71	25.54	13.88	8.04	4.92	3.26	2.32	1.79

6. Conclusions

In this paper, two approaches were proposed to monitor multinomial logistic profiles in Phase II. Multinomial responses are commonly encountered in situations where data can be classified as categories. In our study, we used the case of alloy fasteners to evaluate performances of the two proposed approaches using simulation. Performance of the proposed method are evaluated in terms of average run length criterion. Novelty of this paper is in using Poisson GLM with log link.

References

- [1] Amiri, A., Jensen, W.A., Kazemzadeh, R.B., *A Case Study on Monitoring Polynomial Profiles in the Automotive Industry*. Quality and Reliability Engineering International, 26, 2010, 509-520.
- [2] Yeh, A.B., Huwang, L., Li, Y.M., *Profile Monitoring for a Binary Response*. IIE Transactions, 41, 2009, pp. 931 – 941.
- [3] Noorossana, R., Izadbakhsh, H., *Profile Monitoring for Multinomial Responses (In Farsi)*. International Journal of Industrial Engineering and Production Management, in press.
- [4] Noorossana, R., Eyvazian, M., Amiri, A., Mahmoud, M.A., *Statistical Monitoring of Multivariate Multiple Linear Regression Profiles in Phase I with Calibration Application*. Quality and Reliability Engineering International, 26, 2010, pp. 291-303.
- [5] Izadbakhsh, H., Noorossana, R., Saghaei, A., *Phase II Profile Monitoring for Ordinal Responses*. Advanced Manufacturing Technology, (Under Review), 2012.
- [6] Ho, L.L., El, Said M., Kim, R.W., *Monitoring the Parameters of the Market Model by Linear Profile Procedures*. Economic Quality Control, 25, 2010, pp. 81-96.
- [7] Zou, C., Ning, X., Tsung, F., *LASSO-Based Multivariate Linear Profile Monitoring*. Annals of Operations Research, 192, 2010, pp. 1-17.
- [8] Kang, L., Albin, S., *On-Line Monitoring when the Process Yields a linear*. Journal of Quality Technology, 32, 2010, pp. 418-426.
- [9] Kim, K., Mahmoud, M.A., Woodall, W.H., *On the Monitoring of Linear Profiles*. Journal of Quality Technology, 35, 2003, pp. 317-328.
- [10] Woodall, W.H., Spitzner, D.J., Montgomery, D.C., Gupta, S., *Using Control Charts to Monitor Process and Product Quality Profiles*. Journal of Quality Technology, 36, 2004, pp. 309-320
- [11] Woodall, W.H., *Current Research on Profile Monitoring*. Produção, 17, 2007, pp. 420-425.
- [12] Noorossana, R., Amiri, A., Soleimani, P., *On the Monitoring of Autocorrelated Linear Profiles*. Communications in Statistics. Theory and Methods, 37, 2008, pp. 425-442.
- [13] Zou, C., Zhang, Y., Wang, Z., *A control Chart Based on a Change-Point Model for Monitoring Linear Profiles*. IIE Transactions, 38, 2006, pp. 1093-1103.
- [14] Mahmoud, M.A., Parker, P.A., Woodall, W.H., Hawkins, D.M., *A Change Point Method for Linear Profile Data*. Quality and Reliability Engineering International, 23, 2007, pp. 247-268.
- [15] Gupta, S., Montgomery, D., Woodall, W., *Performance Evaluation of two Methods for Online Monitoring of Linear Calibration Profiles*. International Journal of Production Research, 44, 2006, pp. 1927-1942.
- [16] Soleimani, P., Noorossana, R., Amiri, A., *Simple Linear Profiles Monitoring in the Presence of Within Profile Autocorrelation*. Computers & Industrial Engineering, 57, 2009, pp. 1015-1021.
- [17] Zou, C., Tsung, F., Wang, Z., *Monitoring General Linear Profiles using Multivariate Exponentially Weighted Moving Average Schemes*. Technometrics, 49, 2007, pp. 395-408.
- [18] Kazemzadeh, R., Noorossana, R., Amiri, A., *Phase I Monitoring of Polynomial Profiles*. Communications in Statistics. Theory and Methods, 37, 2008, pp. 1671-1686.
- [19] Kazemzadeh, R., Noorossana, R., Amiri, A., *Phase II Monitoring of Auto Correlated Polynomial Profiles in AR(1) processes*. ScientiaIranica, 17, 2010, pp. 12-24.
- [20] Mahmoud, M.A., *Phase I Analysis of Multiple Linear Regression Profiles*. Communications in Statistics-Simulation and Computation, 37, 2008, pp. 2106 - 2130.
- [21] Jensen, W.A., Birch, J.B., Woodall, W.H., *Monitoring Correlation Within Linear Profiles using Mixed Models*. Journal of Quality Technology, 40, 2008, pp. 167-183.
- [22] Williams, J.D., Woodall, W.H., Birch, J.B., *Statistical Monitoring of Nonlinear Product and Process Quality Profiles*. Quality and Reliability Engineering International, 23, 2007, pp. 925-941.
- [23] Ding, Y., Zeng, L., Zhou, S., *Phase I Analysis for Monitoring Nonlinear Profiles in Manufacturing Processes*. Journal of Quality Technology, 38, 2006, pp. 199-216.
- [24] Mosesova, S.A., Chipman, H.A., MacKay, R.J., Steiner, S.H., *Profile Monitoring Using Mixed-Effects Models*. submitted for publication, 2007.
- [25] Jensen, W.A., Birch, J.B., *Profile Monitoring via Nonlinear Mixed Models*. Journal of Quality Technology, 41, 2009, pp. 18-34.
- [26] Vaghefi, A., Tajbakhsh, S., Noorossana, R., *Phase II Monitoring of Nonlinear Profiles*. Communications in

- Statistics: Theory and Methods, 38, 2009, pp. 1834-1851.
- [27] Paynabar, K., Jin, J., *Characterization of Non-Linear Profiles Variations using Mixed-Effect Models and Wavelets*. IIE Transactions, 43, 2011, pp. 275 -290.
- [28] Noorossana, R., Eyvazian, M., Vaghefi, A., *Phase II Monitoring of Multivariate Simple Linear Profiles*. Computers & Industrial Engineering, 58, 2010, pp. 563-570.
- [29] Eyvazian, M., Noorossana, R., Saghaei, A., Amiri, A., *Phase II Monitoring of Multivariate Multiple Linear Regression Profiles*. Quality and Reliability Engineering International, 27, 2011, pp. 281-296.
- [30] Noorossana, R., Saghaei, A., Amiri, A., *Statistical Analysis of Profile Monitoring*. Wiley Series in Probability and Statistics. First Edition, 2011.
- [31] Shang, Y., Tsung, F., Zou, C., *Profile Monitoring with Binary Data and Random Predictors*. Journal of Quality Technology, 43, 2011, pp. 196-208.
- [32] Noorossana, R., Niaki, S. M. T., Izadbakhsh, H., *Statistical Monitoring of Nominal Logistic Profiles in Phase II*. Communications in Statistics: Theory and Methods, (Under Review), 2012.
- [33] Izadbakhsh, H., Noorossana, R., Zarinbal, M., Zarinbal, A., Safaian, M., Chegeni, M., *An EWMA Based Method for Monitoring Polytomous Logistic Profiles*. IEEE IEEM, Singapore, 2011, pp. 1359-1363.
- [34] Noorossana, R., Izadbakhsh, H., *Profile Monitoring for Ordinal Responses in Phase I*. Texas Journal of Science, (Under Review), 2012.
- [35] Schabenberger, O., Pierce, F.J., *Contemporary Statistical Models for the Plant and soil Sciences*. CRC, 2002.
- [36] Agresti, A., *Categorical Data Analysis*. Wiley-interscience, 2003.