



## Developing a New Model for availability Optimization Applied to a Series-Parallel System

A. Yahyatabar Arabi, A. Eshraghniaye Jahromi\* & M. Shabannataj

Ali Yahyatabar Arabi, MSc. student, Industrial Engineering, Sharif university of Technology, Iran, Tehran, aya6425@gmail.com

Abdolhamid Eshraghniaye Jahromi, Associate Professor, Industrial Engineering, Sharif University of Technology, Iran, Tehran, Eshragh@sharif.ir

Mohammad Shabannataj, MSc. student, Industrial Engineering, Shomal University, Iran, Mahdinattaj2020@gmail.com

### KEYWORDS

Availability optimization,  
Maintenance resource,  
Redundancy level

### ABSTRACT

*Redundancy technique is known as a way to enhance the reliability and availability of non-reparable systems, but for repairable systems, another factor is getting prominent called as the number of maintenance resources. In this study, availability optimization of series-parallel systems is modelled by using Markovian process by which the number of maintenance resources is located into the objective model under constraints such as cost, weight, and volume. Due to complexity of the model as nonlinear programming, solving the model by commercial softwares is not possible, and a simple heuristic method called as simulated annealing is applied. Our main contribution in this study is related to the development of a new availability model considering a new decision variable called as the number of maintenance resources. A numerical simulation is solved and the results are shown to demonstrate the efficiency of the method.*

© 2013 IUST Publication, IJIEPR, Vol. 24, No. 2, All Rights Reserved.

### 1. Introduction

Evaluate the performance of repairable system such as manufacturing systems, power industry, aircraft and oil industry. Two general ways have been developed to increase availability of an engineering system known as increasing the availability of each component and redundancy level.

Availability of a system directly depends on availability of its components. Reliability and maintainability of each component lead to enhancement in availability. Due to limitation in technology, the second way is redundancy allocation. Redundancy in a system means that the components are structured in parallel. Redundancy allocation problem (RAP) is the most common method to meet the optimization of reliability and availability subject to the realistic constraints such as cost, weight, volume, etc [4, and 8]. Considering

nature and application of systems, they are categorized into repairable and non-repairable systems. In the real world, so many systems are repairable and a repairable system can be restored and work properly. Repairable series-parallel systems are frequently used in practice, e.g., power systems, telecommunications systems, manufacturing production systems, and industrial systems. In this regard, availability is getting more serious. A comprehensive study on repairable system is presented in [11, and 12]. Barlow and Hunter [1] first presented a minimal repair model in which the minimal repair does not affect the lifetime of the system. A cold stand-by repairable system has been studied by [14]. Each component after repair is not 'as good as new'. With respect to this assumption, a geometric process was used. Baron et al. [2] investigates a k-out-of-n system with several predetermined repair facilities in which phase type repair time and both strategies are considered. Vanderperre [13] studies on a system consisting of several active and standby components with constant failure rate and arbitrary distribution for repair time. A single repair facility is considered. In

\* Corresponding author: Abdolhamid Eshraghniaye Jahromi

Email: Eshragh@sharif.ir

Paper first received Jan. 28, 2013, and in accepted form Feb. 19, 2013.

[6], Frostige et al. propose a study on the availability of a k-out-of-n repairable system. They use Markov renewal processes for a k-out-of-n system in which components are repairable. Zhang et al. [15] analyze a k-out-of-(m+n) warm standby repairable system. The system is divided into two separate types of components, m and n components. The first type is supposed to have lower failure rate. In accordance with the Markov process, a method is proposed to find the solutions of system availability. Levitin and Lisnianski [9] presented an optimization method that minimizes the total cost considering replacement frequency, preventive and corrective maintenance. Elegbede and Adjallah [5] proposed a method based on Genetic Algorithm and experiments plan to optimize the availability and the cost of repairable parallel-series systems.

Castro and Cavalca [3] studied on availability optimization of series-parallel systems considering redundancy level and team maintenance action as decision variables considering constraints such as cost, weight, and volume. Castro and Cavalca [3] applied dependability ratio to consider maintenance team as a decision variable in objective function. Genetic algorithm was the method to solve their problem. The impact index “I” has been introduced as an input parameter to the model, defined as the dependability ratio sensitivity to the corrective maintenance resources on a specific component.

The aim of this paper is to present a new model for availability optimization of series-parallel system using Markovian process considering common constraints such as cost, weight, and volume. Due to complexity degree of the model, a simulated annealing method is proposed to solve the model. Simulated annealing as a straightforward heuristic algorithm is used to solve the proposed problem of the new model. In this study, our main contribution is that maintenance resources are taken account into the objective function without any additional input, vital parameters such as parameter in [3] that its value significantly affects the solution. In [3], an input parameter is added to the model called as impact index “I” affecting obtained solutions, to properly determine the value of “I” is vital to get the optimal or near optimal solution. This paper organized as follows. Section 2 presents a proposed model and mathematical formulation. The simulated annealing method and its application is described in section 3. An adapted example is solved in section 4. Finally, section 5 presents conclusion.

## 2. The Proposed Availability Optimization Problem

### 2-1. System Description

This study proposes an availability model for a series system with multiple redundant subsystems including repairable active components. In this model, to increase the availability of system, two decision variables are considered: the number of maintenance

resources and redundancy level. The goal of the problem is to find the optimal values of these decision variables in each subsystem in the presence of the constraints such as weight, cost, and volume. The notations and assumption of the model are presented in the following.

#### 2-1-1. Notation

$m$  : the number of subsystem

$n_j$  : the number of redundant components in the subsystem j

$\lambda_i$  : failure rate of each component when there are i failed component

$\lambda_j$  : failure rate of each component in the subsystem j

$\mu_i$  : repair rate, when there are i failed component

$\mu_j$  : repair rate of each component in the subsystem j

$r_j$  : the number of maintenance resource allocated to the subsystem j

$P_{i,j}(t)$  : the probability that there are i failed components in the subsystems j at time t

$P_{i,j}$  : steady-state probability that there are i failed components in the subsystem j

$P'_{i,j}(t)$  : first derivation of  $P_{i,j}(t)$

$A_{sub j}(t)$  : point availability of the subsystem j at time t

$A_{sub j}$  : steady-state availability of the subsystem j

$A_s$  : availability of the system

C : system cost

W : system weight

V : system volume

CM : system maintenance cost

crec : corrective maintenance cost

cm : component maintenance cost

$c_j$  : component cost in the subsystem j

$w_j$  : components weight in the subsystem j

$v_j$  : component volume in the subsystem j

$q_j$  : probability of failure in the subsystem j

#### 2-2-1. Assumptions

- Only one maintenance resource is allowed to allocate to the repair of a failed component. The time to repair a failed component follows identical independent exponential. ( $1 \leq r_j \leq n_j$ ).
- All components in each subsystem follow independent exponential lifetime distribution.
- Subsystem j is called failed as soon as the number of failed component just reached  $n_j$ , and the


system is considered failed as soon as one of the subsystem has failed.

- When a component of a subsystem fails, allocated repairman of the subsystem, if available, immediately begins; if not, the failed component must wait for the repairman. The repair is based on first-come, first-served.
- The probability that two or more components are restored or become failed simultaneously in a small interval is not considered.

**2-2. Mathematical Model**

This model presents an objective function associated to the maximization of the availability. The equation (1) can express the availability of the system regarding Fig. 1 as follows:

$$A_s = \prod_{j=1}^m A_{subj} \tag{1}$$

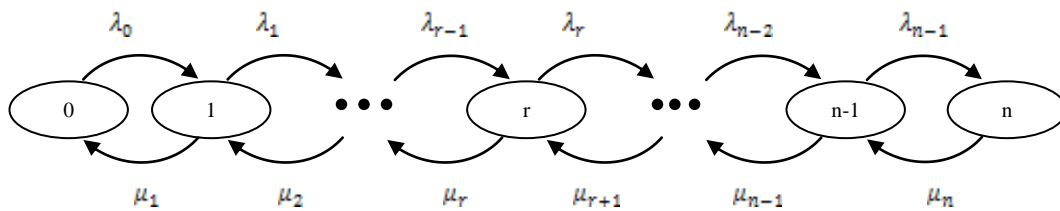

**Fig. 1. The state transition diagram of a repairable parallel system**

$P_{i,j}(t + \Delta t)$  represents the probability that there are  $i$  failed components in the subsystem  $j$  at time  $(t, t + \Delta t)$ . To obtain this probability, following events are evaluated:

During  $(t, t + \Delta t)$ , a transition happens, the subsystem  $j$  is in status  $i+1$  at time  $t$  and is in status  $i$  at time  $t + \Delta t$ .

During  $(t, t + \Delta t)$ , a transition happens, the subsystem  $j$  is in status  $i - 1$  at time  $t$  and is in status  $i$  at time  $t + \Delta t$ .

During  $(t, t + \Delta t)$ , no change in the subsystem  $j$  status happens.

During  $(t, t + \Delta t)$ , the subsystem  $j$  status is transmitted by two or more.

According to the Poisson process, the last event is negligible and close to zero. Based on the Fig. 1, the probability of the subsystem can be indicated in the following:

$$\begin{aligned} P_{i,j}(t + \Delta t) &= P_{i+1,j}(t)(1 - \lambda_{i+1}\Delta t)(\mu_{i+1}\Delta t) + \\ &P_{i-1,j}(t)(\lambda_{i-1}\Delta t)(1 - \mu_{i-1}\Delta t) + \\ &P_{i,j}(t)(1 - \lambda_i\Delta t)(1 - \mu_i\Delta t) \\ &= P_{i,j}(t) - P_{i,j}(t)(\lambda_i + \mu_i)\Delta t + \\ &P_{i-1,j}(t)(\lambda_{i-1}\Delta t) + P_{i+1,j}(t)(\mu_{i+1}\Delta t) \end{aligned} \tag{4}$$

The primary stage of making the model is to calculate the availability of the subsystem  $j$  that is explained in the following :

$$A_{subj}(t) = 1 - P_{n_j-k_j+1,j}(t) \tag{2}$$

$$A_{subj} = \lim_{t \rightarrow \infty} A_{subj}(t) = 1 - \lim_{t \rightarrow \infty} P_{n_j-k_j+1,j}(t) \tag{3}$$

As per the model description, steady-state availability of a parallel system is described using Markovian process to obtain the availability of each subsystem. The state transition diagram of a parallel system is given in Fig. 1. The number in each circle states the number of failed components.

Where,  $\Delta t \rightarrow 0$

$$P'_{i,j}(t) = -(\lambda_i + \mu_i)P_{i,j}(t) + \lambda_{i-1}P_{i-1,j}(t) + \mu_{i+1}P_{i+1,j}(t) \tag{5}$$

$$P_{i,j} = \lim_{t \rightarrow \infty} P_{i,j}(t) \tag{6}$$

$$\lim_{t \rightarrow \infty} P'_{i,j}(t) = \lim_{t \rightarrow \infty} (-(\lambda_i + \mu_i)P_{i,j}(t) + \lambda_{i-1}P_{i-1,j}(t) + \mu_{i+1}P_{i+1,j}(t)) \tag{7}$$

$$-(\lambda_i + \mu_i)P_{i,j} + \lambda_{i-1}P_{i-1,j} + \mu_{i+1}P_{i+1,j} = 0 \tag{8}$$

$$-\lambda_0 P_{0,j} + \mu_1 P_{1,j} = 0 \tag{9}$$

$$P_{1,j} = \frac{\lambda_0}{\mu_1} P_{0,j}, \quad P_{2,j} = \frac{\lambda_0 \lambda_1}{\mu_1 \mu_2} P_{0,j}, \quad \dots, \tag{10}$$

$$P_{i,j} = \frac{\lambda_0 \dots \lambda_{i-1}}{\mu_1 \dots \mu_i} P_{0,j}$$

$$P_{0,j} + P_{1,j} + \dots + P_{n_j,j} = 1 \tag{11}$$

$$P_{0,j} = (1 + \sum_{i=1}^{n_j} \frac{\lambda_0 \dots \lambda_{i-1}}{\mu_1 \dots \mu_i})^{-1} \tag{12}$$

$$P_{i,j} = \frac{\lambda_0 \dots \lambda_{i-1}}{\mu_1 \dots \mu_i} \left(1 + \sum_{i=1}^{n_j} \frac{\lambda_0 \dots \lambda_{i-1}}{\mu_1 \dots \mu_i}\right)^{-1} \quad (13)$$

To evaluate the availability of subsystem  $j$  based on equations above:

$$A_{sub j} = 1 - P_{n_j - k_j + 1, j} = 1 - \frac{\lambda_0 \dots \lambda_{n_j - k_j}}{\mu_1 \dots \mu_{n_j - k_j + 1}} \left(1 + \sum_{i=1}^{n_j - k_j + 1} \frac{\lambda_0 \dots \lambda_{i-1}}{\mu_1 \dots \mu_i}\right)^{-1} \quad (14)$$

Therefore the availability of the system based on equation (1) can be represented as follows:

$$A_s = \prod_{j=1}^m \left(1 - \left(\frac{n_j!}{r_j! r_j^{n_j - r_j}} \left(\frac{\lambda_j}{\mu_j}\right)^{n_j} \left(1 + \sum_{i=1}^{r_j} \binom{n_j}{i} \left(\frac{\lambda_j}{\mu_j}\right)^i + \sum_{i=r_j+1}^{n_j} \frac{n_j \left(\frac{\lambda_j}{\mu_j}\right)^i}{(n_j - i)! r_j! r_j^{i - r_j}}\right)^{-1}\right)\right) \quad (15)$$

This study uses the result of queuing theory for the failure rate of the subsystem  $j$  and repair rate of the subsystem  $j$  as follow:

$$\lambda_j = (n - i)\lambda \quad (16)$$

$$\mu_i = \begin{cases} i\mu & 0 \leq i \leq r_j \\ r_j\mu & r_j \leq i \leq n_j \end{cases} \quad (17)$$

According to equations above, the mathematical model of the system can be computed as below:

Max

$$A_s = \prod_{j=1}^m \left(1 - \left(\frac{n_j!}{r_j! r_j^{n_j - r_j}} \left(\frac{\lambda_j}{\mu_j}\right)^{n_j} \left(1 + \sum_{i=1}^{r_j} \binom{n_j}{i} \left(\frac{\lambda_j}{\mu_j}\right)^i + \sum_{i=r_j+1}^{n_j} \frac{n_j \left(\frac{\lambda_j}{\mu_j}\right)^i}{(n_j - i)! r_j! r_j^{i - r_j}}\right)^{-1}\right)\right) \quad (18)$$

S.t.:

$$\sum_{j=1}^m c_j n_j \leq C \quad (19)$$

$$\sum_{j=1}^m c_{rec} r_j + (1 - e^{-\lambda_j T}) n_j c_m j \leq CM \quad (20)$$

$$\sum_{j=1}^m w_j n_j \leq W \quad (21)$$

$$\sum_{j=1}^m v_j n_j \leq V \quad (22)$$

### 3. Simulated Annealing Algorithm

The proposed model is so difficult, and software such as LINGO and GAMS cannot find good solutions in an efficient time. So, a meta-heuristic algorithm role is so important in this problem to find good results in an efficient time. This algorithm was proposed by Kirkpatrick, Gelat, and Vecchi [7] as an extension of the Metropolis-Hastings algorithm [10]. Its name refers to physical process of annealing in metallurgy. Achieving a minimum energy crystalline structure is a reason that SA technique is extended in metallurgy, and it requires heating and slow cooling of materials. The SA algorithm follows this process with the aim of finding a proper solution while providing the opportunity to escape from local optima. The opportunities to jump from local optima depend on the temperature. The more temperature provides the more opportunity. As per the process ‘cools’, the focus is on finding an optimal solution, so the probability of a jump to a new neighbourhood is reduced.

The process starts with the highest temperature ( $T_0$ ), which reduces after each repeat. After an initial solution is generated, a random search is conducted to move from the current solution to a neighbourhood solution. The neighbourhood range selection is on the shoulder of users, and it is so important for the success of SA algorithm. A new solution with a better objective value will always be accepted. But for the solution with worse objective value, there is also an opportunity to accept based on a probability  $p$  which is given by  $p = \exp(-\Delta/T)$ , where  $\Delta$  is the difference between the objective value of new solution and the current solution, and  $T$  is the current temperature.

Fitness function is the main part of all heuristic algorithms. Fitness function plays a key role to guarantee the feasible and global solution. With respect to equations (18) to (22), the fitness function in the proposed algorithm is represented as follows:

$$F = A_s / \left(1 - (\min(0, (C - \sum_{j=1}^m (c_j n_j + h_j r_j)) + \min(0, (CM - \sum_{j=1}^m (c_{rec} r_j + (1 - e^{-\lambda_j T}) n_j c_m j)))\right) \right) \quad (23)$$

$$+ \min(0, (W - \sum_{j=1}^m (w_j n_j))) +$$

$$\min(0, (V - \sum_{j=1}^m (v_j n_j)))$$

**4. A Numerical Example**

To illustrate the analysis of the proposed problem, a numerical example is solved by the simulated annealing method. The input data is presented in Table1. Time T is set to 100 time units. A system with five subsystem has been solved by the simulated annealing described in the previous section. By using MATLAB R2009ea on the Intel Core 2 Duo CPU 2.66 and GHz 2.67 GHz PC, an algorithm has been coded to find the solution. Due to the stochastic nature of the

proposed SA, 50 independent runs were made for the example involving 50 different initial solutions. For all examples, the parameters of SA are set as follows:  $\alpha$  (cooling rate)=0.9,  $T_0=1000$ ,  $T_f$  (the final temperature)=0.01, Miter=200. The maximum availability found by the proposed SA is used to compare the exact solution. The result of running the SA is presented in Table2. It is obviously shown that, the difference between the solution by the proposed algorithm and the exact optimal solution is so trivial.

**Tab. 1. System data**


Subsystem	$\lambda$	$\mu$	Design	Weight	Volume	Corrective	Corrective Maintenance
			Cost			Maintenance Cost	Resource Cost
1	0.002	0.02	50	50	55	60	7
2	0.0018	0.028	55	45	50	40	3
3	0.0016	0.025	55	80	70	45	4
4	0.0013	0.033	40	35	35	30	2
5	0.002	0.033	60	70	65	50	5

**Tab. 2. Comparison between the proposed method and exact optimsl solution**

Subsystem	Exact optimal solution		Solution by SA	
	Redundacy level	Maintenance resource	Redundancy level	Maintenance resource
1	4	4	3	2
2	3	3	4	3
3	3	3	2	1
4	4	3	3	2
5	3	3	4	3
<b>Availability</b>	<b>0.999304526</b>		<b>0.990985041</b>	

**Tab. 3. Statistical results of running SA for 50 runs**

Minimum	Maximum	Mean	Standard deviation
0.980789039	0.990985041	0.990065441	0.001381065

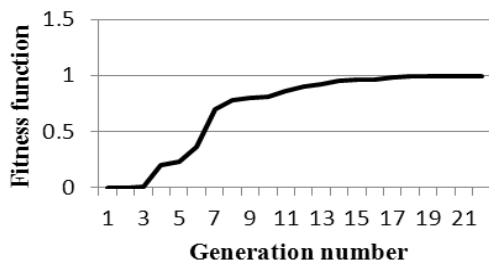

**Fig. 2. Fitness convergence**

Fig. 2 illustrates the convergence of the fitness for the example, the near optimal solution is approximately achieved after 20 generations. Maximum, minimum, average and standard deviation of all examples are shown in table 3. It is obviously indicated that all standard deviations are trivial and difference between

maximum and minimum is also trivial in each example. The results in table 3 indicate that the proposed algorithm strongly converged to the optimal solution.

**5. Conclusion**

In this paper, availability optimization of a series system with five redundant subsystems has been modelled through Markovian process. The main contribution of this study refers to consider the number of maintenance resources and redundancy level together as decision variables subject to constraints such as weight, cost, and volume.

The presented model has been formulated as nonlinear integer programming. To find the exact solution of the problem is not easy especially for large systems. A heuristic method called as simulated annealing used to solve the problem. Results calculated

in table 2 and 3 shows the proper performance of the model and method.

### Reference

- [1] Barlow, R.E., Hunter, L.C., Optimum preventive maintenance policy. *Operations Res*, Vol (8), 1960, pp. 90–100.
- [2] Barron, Y., Frostig, E., Levikson B., *Analysis of r Out of n Systems with Several Repairmen*, exponential life times and phase type repair times: an algorithmic approach. *European Journal of Operation Research*, Vol (169), 2006, pp.202–25.
- [3] Castro, H.F., Cavalca, K.L., *Availability Optimization with Genetic Algorithm*. *International Journal of Quality and Reliability Management*, Vol(20), 2003, pp.847–63.
- [4] David, W.C., *Maximization of System Reliability with a Choice of Redundancy Strategies*. *IIE Transactions*, Vol(35), 2003, pp.535-543.
- [5] Elegbede, C., Adjallah, K., *Availability Allocation to Repairable Systems with Genetic Algorithms: a Multi-Objective Formulation*. *Reliability Engineering and System Safety*, Vol (82), 2003, pp.319–30.
- [6] Frostig, E., Levikson, B., *On the Availability of an r out of n Repairable Systems*. *Naval Research Logistics* Vol(49), 2002, pp.483–98.
- [7] Kirkpatrick, S., Gelatt, C.D., Vecchi, M.P., *Optimization by Simulated Annealing*. *Sci*, Vol (220), 1983, pp.671-680.
- [8] Kuo,W., Prasad, V.R., Tillman, F.A., & Hawang, C.(2001). *Optimal reliabilitydesign fundamental and application*. London: Cambridge University Press.
- [9] Levitin, G., Lisnianski, A., *Joint Redundancy and Maintenance Optimization for Multistate Series-Parallel Systems*. *Reliability, Engineering and System Safety* Vol(64), 1999, pp.33–42.
- [10] Metropolis, N., Rosenbluth, M.N., Teller, A.H., *Equation of State Calculations by Fast Computing Machines*. *Journal of Chemical Physics*, Vol (21), 1953, pp.1087-1093.
- [11] Pham, H., Wang, H.Z., *Imperfect Maintenance*. *European Journal of perational Research*,Vol (94), 1996, pp.425-438.
- [12] Scarf, P.A., *On the Application of Mathematical Models in Maintenance*. *European Journal of Operational Research*, Vol(99), 1997, pp. 493-506.
- [13] Vanderperre, E.J., *On the Reliability of a Cold Standby System Attended by a Single Repairman*. *Microelectronics and Reliability*, V(35), 1995, pp.1511-1513.
- [14] Yuan, L.Z., *An Optimal Geometric Process Model for a Cold Standby Repairable System*. *Reliability Engineering and Systems Safety*, Vol(63), 1999, pp.107–110.
- [15] Zhang, T., Xie, M., Horigone, M., *Availability and Reliability of a k-out-of-(M+N): Warm-Standby Systems*. *Reliability Engineering and System Safety* , Vol(91), 2006, pp.381–387.