



Solving the Airline Recovery Problem By Using Ant Colony Optimization

Seyed Hessameddin Zegordi* & Niloofar Jafari

*Seyed Hessameddin Zegordi, Associate Professor of Industrial Engineering, Tarbiat Modares University, I.R.. IRAN,
Niloofar Jafari, Ph.D. of Industrial Engineering, Tarbiat Modares University, I.R. .IRAN,*

KEYWORDS

Airline Scheduling,
Disruption Management,
Aircraft Recovery,
Ant Colony Optimization Algorithm

ABSTRACT

In this paper an Ant Colony (ACO) algorithm is developed to solve aircraft recovery while considering disrupted passengers as part of objective function cost. By defining the recovery scope, the solution always guarantees a return to the original aircraft schedule as soon as possible which means least changes to the initial schedule and ensures that all downline affects of the disruption are reflected. Defining visibility function based on both current and future disruptions is one of our contributions in ACO which aims to recover current disruptions in a way that cause less consequent disruptions. Using a real data set, the computational results indicate that the ACO can be successfully used to solve the airline recovery problem.

© 2010 IUST Publication, IJIEPR, Vol. 21, No. 3, All Rights Reserved.

1. Introduction

Different events ranging from severe weather to the crew sickness inhibit airlines ability to always satisfy their planning and disrupt schedules. If such disruptions are not managed suitably and timely, they will severely affect the airlines performance. Occurring disruptions, airlines correct their flight operations by delaying flight departures, canceling flights, rerouting aircraft, reassigning crews or calling in new crews, and re-accommodating passengers. The goal is to get feasible, cost-minimizing plans that allow the airline to recover from the disruptions and their associated delays [1]. This problem has been studied since last three decades. Aircraft, crew and passengers are the most important aspects of airline disruption management [2]. Nowadays, in the airline industry, recovery planning is made in a primarily sequential manner, first recovering aircraft, then crew, and finally passengers [3, cited in 4].

Aircraft Recovery problem which is considered in this paper is to decide flight re-timings, flight cancellations, and revised routings for affected aircraft. These adjustments must satisfy maintenance requirements, station departure curfew restrictions and aircraft balance requirements, particularly at the beginning and end of the recovery period. At the end of the period, aircrafts should be positioned to resume operations as planned [1]. Complete explanation of concepts and models in aircraft recovery problem can be obtained in Clausen et al. [5], Yu and Qi [6], Kohl et al. [7], Anderson and Varbrand [8], Filar et al. [3] and Clarke [9]. When the aircraft recovery problem is solved, it can result in disrupted passengers. Canceling or delaying the departure of a flight will directly affect the passengers on that particular flight. It can also, indirectly, affect the passengers on the next flight in the route for the aircraft in question, if the planned ground time between the two flights is too short to cover for the delay [8]. A limitation of most of the existing aircraft recovery models is that passengers are not modeled clearly. Jafari and Zegordi [10, 11] have developed a mathematical model for airlines schedule recovery which recovers aircrafts and disrupted passengers simultaneously. But they have not

* Corresponding author. Seyed Hessameddin Zegordi
Email: Zegordi@modares.ac.ir Niloofar.Jafari@gmail.com
Paper first received March. 12. 2010, and in revised form
August. 21. 2010.

presented a solution methodology for their model especially for large scale cases. One important quality of a recovery solution strategy and algorithm is that it has to produce a solution fast. Løve et al. [12] claim that it should be generated in less than 3 min, otherwise the recovery solution can become infeasible. During the last two decades, some powerful metaheuristics have been developed and successfully applied when solving many real-life problems [13]. Recently some of the metaheuristics have been applied for recovery problems. Andersson [14] has used a Tabu Search (TS) and a Simulated Annealing (SA) approach to the flight perturbation problem. Jingjie et al. [15] have designed a Tabu Search algorithm to solve an integer programming model for airport gate reassignment. In this paper, using ant colony optimization (ACO) method, a solution for the airline recovery problem is presented.

Defining the recovery scope, it will focus on the disrupted aircrafts and flights instead of all of them. As a result problem size will be reduced and also guarantees a return to the original aircraft schedule. To the best of our knowledge, we are the first researchers to apply ACO in the field of aircraft recovery and our results demonstrate that this approach provides good solutions within a reasonable computation time.

The rest of the paper is organized as follows: Section 2 explains the airline recovery problem considering disrupted passengers. In Section 3 we describe our solution methodology to solve this problem. The computational results are presented in Section 4. In the last Section, we conclude with directions for further research.

2. Airline Recovery Problem Considering Disrupted Passengers

In operation, the schedule frequently faces with disruptions. Then the object is to turn to the initial schedule fast and with the minimum cost. Disruption or its affects can disrupt flights and their resources as well as passengers, so it is required to generate recovery plan for disrupted flights, disrupted resources and disrupted passengers [10].

In order to do this, flights can be delayed or cancelled. New aircraft assignments, i.e. swaps, can be made, both within a fleet of aircraft as well as between different aircraft types. However, a flight can only be transferred from one aircraft type to another if the new aircraft has sufficient capacity to handle the passengers on the flight. Also passengers must be arrived to their destinations. Aircraft recovery formulation is as follows [10]:

$$\begin{aligned}
 \text{MIN} \sum_{f \in F_s} \sum_{k \in K_s} C_{kf} \cdot x_{kf} + \sum_{f \in F_s} CD_f \cdot (1 - z_f) \cdot [td_f - T_f] NP_f + \\
 \sum_{f \in F_s} CC_f \cdot z_f \cdot NP_f + \sum_{p \in P} \sum_r CD_f \cdot it_p^r \cdot (td_{it(r,l)} - td_{it(p,l)}) + \\
 \sum_{p \in P} S_p \cdot trn_p
 \end{aligned} \tag{1}$$

Subject to:

$$x_{kf_{ro}} + \sum_{f'} x_{kf'_{ro'}} \leq 1 \tag{2}$$

$$f \in \text{first flight of } ro, \quad \forall ro \in RO_s,$$

$$f' \in \text{first flight of } ro' \in RO_s \text{ When } T_{f'} > T_f \text{ and}$$

$$T_{\text{lastflight of } ro} + DT_{\text{lastflight of } ro} \geq T_{f'} + \text{Maximum Delay allowed}$$

$$\forall k \in K \text{ in } S$$

$$1 - z_f = \sum_{k \in K_s} x_{kf} \quad \forall f \in F_s \tag{3}$$

$$x_{k_{f+1}} - x_{k_f} = 0 \quad \forall k \in K_s, f_i \in ro \in RO_s \tag{4}$$

$$td_f \geq A_{kf} \cdot x_{kf} \tag{5}$$

$$\forall f \in \text{first flight of rotations in } F_s, k \in K_s$$

$$td_{f_{ro}} \geq ta_{f'_{ro'}} \cdot x_{kf'_{ro'}} \cdot x_{kf_{ro}} + U \tag{6}$$

$$f \in \text{first flight of } ro \in RO_s,$$

$$f' \in \text{last flight of } ro' \in RO_s \text{ When}$$

$$T_{f'} + DT_{f'} \leq T_f + \text{Maximum Delayed allowed},$$

$$\forall k \in K_s$$

$$td_{f_{i+1}} \geq ta_{f_i} + U \quad \forall f \in \text{flights of } ro \in RO_s \tag{7}$$

$$td_f \geq T_f \quad \forall f \in F_s \tag{8}$$

$$ta_f \leq V_k \cdot x_{kf} + (1 - x_{kf}) \cdot UB(ta_f) \quad \forall f \in F_s, k \in K_s \tag{9}$$

$$ta_f = td_f + DT_f (1 - z_f) \quad \forall f \in F_s \tag{10}$$

$$(td_{IT(p,2)} / (ta_{IT(p,1)} + u)) - 1 \geq -y_p$$

$$(td_{IT(p,2)} / (ta_{IT(p,1)} + u)) - 1 \leq 1 - y_p \quad \forall p \in P \tag{11}$$

$$y_p \geq z_f \quad \forall p \in P, \forall f \in IT(p) \tag{12}$$

$$N_p \cdot (1 - y_p) = it_p^p \quad \forall p \in P \tag{13}$$

$$\sum_{p \in P} it_p^r \leq \sum_{p \in P} N_p \cdot (1 - y_r) \quad \forall r \in R(P) \tag{14}$$

$$\sum_{r \in R(p)} it_p^r + trn_p = N_p \cdot y_p \quad \forall p \in P \tag{15}$$

$$\sum_{p \in P} \sum_{r \in R(p)} (1 - \delta_f^r) \cdot \delta_f^r \cdot it_p^r \leq CAP_f \cdot (1 - z_f) \quad \forall f \in R(p) \tag{16}$$

$$x_{rf}, z_f, y_p \in \{0, 1\}, \text{ and}$$

$$td_f, ta_f \text{ are REAL and} \tag{17}$$

$$it_p^p, it_p^r, trn_p \text{ are integer}$$

The decision variables common to the model are:

- x_{kf} : 1 if aircraft k is assigned to flight f and 0 otherwise;
- z_f : 1 if flight f is cancelled and 0 otherwise;
- td_f : Actual departure time of flight f ;
- ta_f : Actual arrival time of flight f ;
- y_p : 1 if planned itinerary p is disrupted, and 0 otherwise.
- it_p^p : Number of passengers which were initially assigned to itinerary p and served on it ;
- it_p^r : Number of passengers which were initially assigned to itinerary p but reassigned to itinerary r .
- trn_p : Number of passengers which were initially assigned to itinerary p but must be served on other airlines or other transportation mode.

The parameters common to the model are:

- A_{kf} : Ready time of aircraft k to operate flight f
- CAP_f : Number of remaining available seats on flight leg f
- CC_f : Cost of canceling flight f
- CD_f : Cost of 1-minute delay of flight f
- C_{kf} : Cost of assigning aircraft k to flight f
- DT_f : Expected trip (block-to-block) time of flight f
- F_s : The set of flights in recovery scope S
- $IT(P)$: The set of flight legs in itinerary p
- $IT(P,L)$: The last flight leg in itinerary p
- $IT(P,n)$: The n^{th} flight leg in itinerary p
- K_s : The set of aircrafts to be used for recovery in scope S
- N_p : Number of passengers on itinerary p
- NP_f : Number of passengers in flight f
- P : The set of passenger itineraries (contains more than one flights)
- $R(p)$: The set of candidate recovery itineraries for itinerary p
- RO_s : The set of aircraft rotations in recovery scope S
- S : Recovery scope index
- S_p : Estimated cost per disrupted passenger which are not reassigned
- T_f : The scheduled departure time of flight f
- U : Minimum connection time
- V_k : The duty (usage) limit of aircraft k
- δ_f^r : An indicator to represent whether flight leg f is in itinerary r or not, equal 1 if flight leg f is in itinerary r and equal 0 otherwise

In Jafari and Zegordi model [10], for each disrupted aircraft the earliest disrupted flight and its departure airport is considered. The disrupted flight and the next flights which turn back the aircraft to this airport are included in the aircraft rotation. Other than the disrupted rotations, some undisrupted rotations (rotations with no aircraft disruptions) have been included. These rotations are used to check the possibility of swapping their aircrafts with the aircrafts of disrupted rotations. The originally assigned aircrafts to all rotations in the scope are considered to be used in the recovery process. As Guo [16], the length of the recovery period is not deterministic. It denotes the

horizon to recover from a disruption. With other words the recovery horizon lasts until all changes caused by the disruption have been carried out. Jafari and Zegordi [10], have done pairwise comparison for rotations of all aircrafts which can be used for the recovery, to check in the case of exchanging their rotations, how long these changes last. This method ensures that all affects of each disruption are investigated. Finishing the comparison, flights and rotations which form the recovery scope are determined. The objective function of the model [10] minimizes the total cost associated to recovering all flights, aircrafts and passengers in the recovery scope. It is include cost of aircrafts assignment, total delay, cancellation and disrupted passengers. The first term in the objective function is to recover open positions of each disrupted flight by using the most efficient aircrafts in the system. The second and third terms promote reliable operations by minimizing flight delay and cancellation, respectively. The remaining terms recover disrupted passengers through reassigning them to the earliest available itinerary or transport them to the destination by any other way, other airlines or an alternative way of transportation. Constraints in (2) assign available aircraft to sequential rotations which are not overlapped. Constraints in (3) ensure that if a flight is canceled, no aircraft is assigned to it. Rotations aircraft usage is defined in Constraints (4). Departure time of each flight is determined in Constraints (5) to (8). Constraints in (9) guarantee that in the case of delay, there is no duty limit violation for that flight's aircraft. Also satisfaction of maintenance requirements of aircrafts can be met here. Constraints in (10) relate the departure and arrival times for each flight. Constraints in (11) and (12) classify disrupted itineraries. Constraints in (13) to (16) reassign disrupted passengers. Finally, Constraints in (17) define the decision variables.

3. Ant Colony Optimization Algorithm

The ACO approach dates back to the pioneering work by Dorigo et al. [17 cited in 18]. ACO randomly constructs solutions in a step-by-step fashion. An ant is a conceptual unit performing a random construction of a solution. So-called pheromone values store information on how good a single construction step was in the past, whereas so-called visibility values evaluate the presumable goodness of that step in the present context [18]. Contrary to most applications of metaheuristics such as simulated annealing (SA) or genetic algorithms (GA), the ACO approach is usually applied to highly constrained problems [18]. Also ACO is one of the heuristic computational procedures that are designed to search and find answers to complex problems in situations where the number of possible alternative solutions is vast [19]. However, the application of ACO is restricted to optimization problems that can be described by graphs [20 cited in

21]. Thus it is expected this technique to be especially appropriate for solving the problem described in the previous sections. The aircraft recovery problem is modeled by a graph where a set of nodes represent aircrafts and the other set represents flights and rotations in the recovery scope (Fig.1). The role of the ants is as aircrafts. They must select the flights and rotations in a way that minimize delay, cancellation and disrupted passengers cost. The flight nodes which are not visited by ants will be assumed as canceled flights.

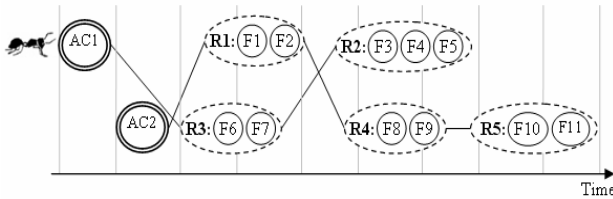


Fig.1. Graph representing the Aircraft Recovery problem with 2 aircrafts (AC1-AC2), 5 rotations (R1-R5) and 11 flights (F1-F11) solved by the ACO.

Each ant chooses aircraft nodes randomly but chooses next flights and rotations nodes to visit based on a probability function by Eqs. (18, 19). Ant k at node F_i (flight i) selects the next node F_j (flight j) to move based on Eq. (18) when $q < q_0$:

$$[\tau(i, j)]^\alpha [\eta(i, j)]^\beta = \max_{F_l \in J_k(i)} [\tau(i, l)]^\alpha [\eta(i, l)]^\beta \quad (18)$$

Where q is a random number uniformly distributed in $[0, 1]$, and $0 < q_0 < 1$ is a predetermined parameter that determines the relative importance of exploitation versus exploration. $\tau(i, j)$ denotes the pheromone level on edge (i, j) . And $\eta(i, j)$ represents a heuristic function for visibility value. $J_k(i)$ denotes the set of nodes to be visited by ant k at node F_i . A node belongs to $J_k(i)$ if it satisfies capacity and duty limit constraints of the aircraft as well as rotation definition. Each aircraft has a specific capacity for passengers therefore flights with less or equal number of passengers can be assigned to that aircraft. Rotations which their last flight arrive after end time of the aircraft can not be assigned to. Flights which belong to the same rotation or one of them is the last flight of a rotation and the other one is the first flight of another one, can be selected sequentially. Parameter α, β determines the relative importance between the density and the visibility. If $q > q_0$, F_j is randomly selected from $J_k(i)$ according to the probability distribution given by the following Eq. (19):

$$P_k(i, j) = \begin{cases} \frac{[\tau(i, j)]^\alpha [\eta(i, j)]^\beta}{\sum_{F_l \in J_k(i)} [\tau(i, l)]^\alpha [\eta(i, l)]^\beta}, & \text{if } j \in J_k(i) \\ 0 & \text{Otherwise} \end{cases} \quad (19)$$

The heuristic function η (Eq. (20)) in this case is the ratio of cost of current disruption of the flight j at time t ($disrupt(j)$) and cost of consequent disruption of choosing flight j after flight i ($disrupt(i, j)$). If a flight is already disrupted or cause less disruption so the ant will feel a stronger attraction to visit it.

$$\eta(i, j) = \begin{cases} \frac{disrupt(j)}{disrupt(i, j)}, & \text{if } j \in J_k(i) \\ 0 & \text{Otherwise} \end{cases} \quad (20)$$

$$disrupt(j) = \begin{cases} delay(j) * NP(j) * CD, & \text{or} \\ NP(j) * CC \end{cases} \quad (21)$$

Flight j is already disrupted as it can not fly according to its initial schedule. It means flight j will be delayed or canceled so cost of current disruption of the flight j at time t ($disrupt(j)$) is calculated based on Eq. (21). Delay cost is multiple of duration of delay ($delay(j)$) to number of passengers of flight j ($NP(j)$) and cost of one minute delay (CD). Cancellation cost is multiple of number of passengers of flight j ($NP(j)$) and cost of cancellation (CC). Cost of current disruption of each unassigned flight ($disrupt(j)$) is updated after each assignment by ants. Therefore effects of every assignment are reflected on the remaining flights and the new decision will be made based on the previous decisions.

$$disrupt(i, j) = \begin{cases} (C \text{ OR } Ct), & \text{or} \\ (delay(j) * NP(j) * CD), & \text{or} \\ (C \text{ OR } Ct) * (delay(j) * NP(j) * CD) \end{cases} \quad (22)$$

Cost of consequent disruption of choosing flight j after flight i ($disrupt(i, j)$) is presented by Eq. (22). When flight j is chosen after flight i , if it is according to the initial schedule it doesn't cause any cost. But in the case that flight j is reassigned to an aircraft different from the initial assignment, it is an aircraft swap. Cost of swap within the same fleet is C and between different aircraft types is Ct . Also flight j may be delayed in the new schedule. When an ant assigns flights to all aircrafts it has finished his job. All g ants finish their jobs during the iteration. The update of the pheromone concentration in the edges is done at the end of each iteration and is given by Eq. (23).

$$\tau(i, j)_{new} = (1 - \rho) * (\tau(i, j)_{old}) + \rho * \sum_{k=1}^g \Delta \tau^k(i, j) \quad (23)$$

Where $\rho \in [0, 1]$ expresses the pheromone evaporation phenomenon, and $\sum_{k=1}^g \Delta \tau^k(i, j)$ are pheromones deposited in the edges (i, j) followed by all the g ants after an iteration, which are defined as:

$$\Delta\tau^k(i, j) = \begin{cases} \frac{\max \text{cost}}{\text{cost}_k}, & \text{if edge}(i, j) \\ & \text{was used by the } k \text{ ant} \\ 0, & \text{otherwise} \end{cases} \quad (24)$$

Where cost_k is the value of the objective function for each ant k and $\max\text{cost}$ is the most value of the objective function in the iteration. ACO algorithm developed for aircraft recovery is illustrated in a flowchart in Fig.2.

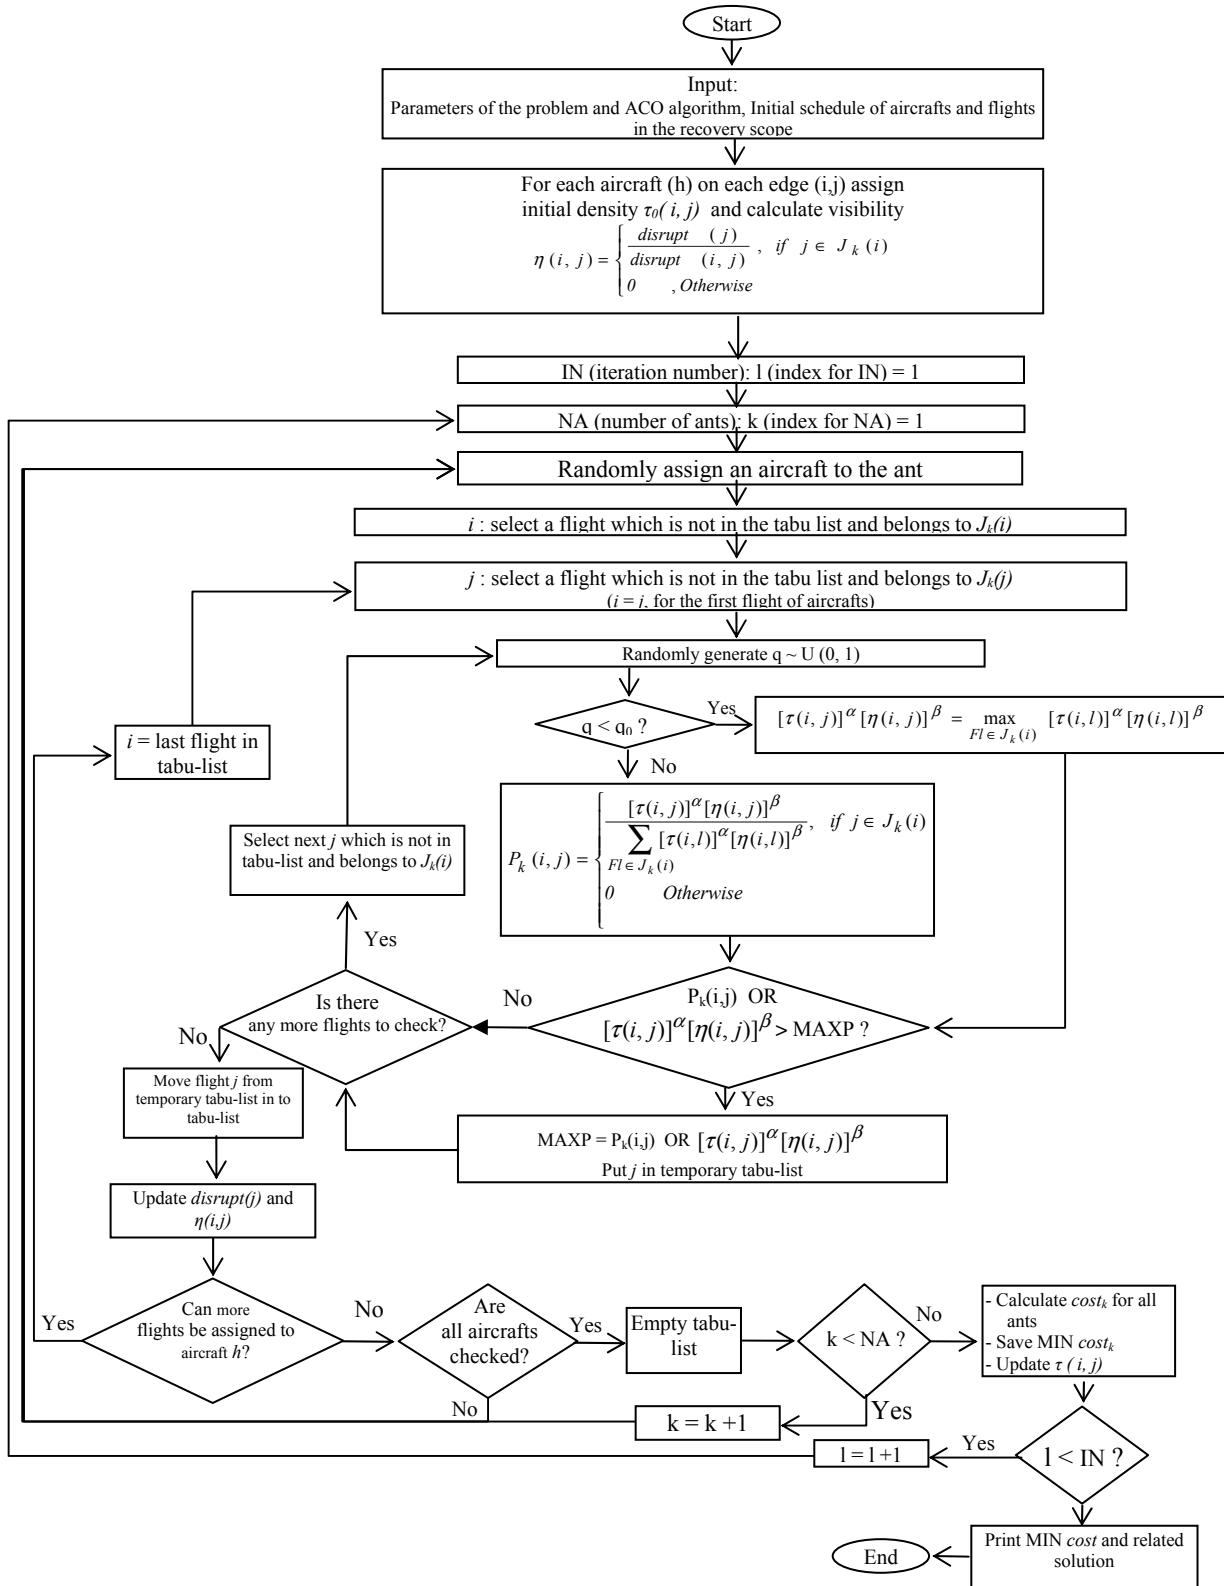


Fig.2. Flowchart of ACO for aircraft recovery problem

According to the related studies, metaheuristics solution performance or quality is sensitive to certain control parameters. ACO control parameters are as follows: iterations number, number of ants in each iteration, relative importance of density and visibility (α), (β), initial density ($\tau_0(i, j)$), evaporation factor (ρ) and importance of exploitation versus exploration (q_0). To set the parameters in the proposed ACO, we ran tests with factorial designing. The tests have been done with iteration numbers of 5, 7, 10, 15 and 20, number of ants of 10, 15, 20 and 25, the relative importance of the visibility parameter (β) of 0.5, 1, 1.5 and 2 and finally with the relative importance of the density parameter (α) of 1, 2, 3, 4 and 5. Based on the results, we found that the following parameter values gave the average best results: Iteration number= 5, number of ants= 20, the relative importance of the visibility parameter (β) = 1 and the relative importance of the density parameter (α) = 3. Pheromone is initialized by setting $\tau_0(i, j) = 1$ for all (i, j) , evaporation factor (ρ) is set to 0.6 and q_0 to 0.7.

4. Computational Results

Our ACO algorithm is tested on a real problem secondary data set obtained from Andersson [14]. The data set (S1) contains short flights, between 15 and 125 minutes and is perturbed in two different ways, *a* and *b*. In “*a*” an aircraft is unavailable for some hours, and in “*b*” some flights are imposed with delays. Some passengers’ itineraries are extracted from data set S1 to

be able to solve simultaneous aircraft and passenger recovery model in this study. Table 1 sums up the important characteristics for the data set. The minimum connecting time between two flights of each aircraft and also for passengers to walk between the arrival and departure gates of the consecutive flights is 10 min. The maximum delay allowed for a single flight is set to 60 min for all flights. The computer program of the ACO algorithm described in section 3 was written in Visual Basic 2008 and ran on a Sony Vaio Intel (R) Pentium (R) M, computer with 768 Mb of memory and 1.73 GHz processors.

Tab. 1. Data set

Data set S1	
Number of aircrafts	13
Number of aircraft types	2
Number of flights	100
Number of airports	19
Number of passengers	2236
Number of Itineraries	8
Number of connecting passengers	55

First the problems are solved as aircraft recovery problem with out considering connecting passengers to show the ability of ACO to suggest good solutions comparing to the results of SA and TS algorithms done by Andersson [14]. The results for the S1a and S1b are presented in Table 2.

Tab. 2. Characteristics of the best known solutions and results of ACO, SA and TS for aircraft recovery for S1a and S1b

n	Weights			Best Known Solution-BKS				Objective Function Value	ACO Result (% from BKS)	SA Result (% from BKS)	TS Result (% from BKS)		
	CC	Ct	C	CD	c	st	s					d	
S1a	1	20	100	10	1	30	2	8	0	880	0	0	0
	2	20	1000	10	1	46	0	4	0	960	0	0	0
	3	100	1000	10	1	32	0	0	1420	4620	0.004	0	0
	4	100	100	10	1	25	4	2	0	2920	0	0	0
S1b	1	20	100	10	1	0	0	12	0	120	0	0	0.045
	2	20	100	100	1	0	0	4	250	650	0	0	0
	3	20	100	400	1	0	0	0	1580	1580	0	0	0

CC is the weight or cost for canceling a flight, Ct the weight for assigning a flight to an aircraft of a different type, C the weight for assigning a flight to an aircraft in the same fleet as originally planned, and CD is the weight for delaying a flight. The best known solutions (BKS) have been calculated by a Lagrangian Heuristic by Andersson and Varbrand [8]. c notes how many passengers that are affected by a cancelled flight, st and s how many swaps between aircraft types and regular swaps that are made, and finally d is the total amount

of passenger delay in the solution. Objective Function Value is based on aircraft recovery formulation Eq. (1). In the last three columns of Table 2, meta-heuristic solutions are compared to the best known solution (BKS) for the particular problems. Results show that ACO is able to suggest good recovery solutions for aircraft recovery problem. ACO solutions are the same as BKS’s except in S1a3 and its difference is just about 0.004%. Running ACO for simultaneous aircraft and passenger recovery model, results and the comparison

with Integer Nonlinear Planning (INLP) method [10] are presented in Tables 3 & 4. Jafari and Zegordi [10] have used LINGO 8.0. Except three cases (S1a- 2-2, 4-1 & S1b- 1-2) solutions obtained by ACO are as well as INLP 's. ACO CPU times are less than INLP's.

5. Conclusion

In this paper while reviewing some related studies in airline recovery, a limitation in this field which is integrated recovery is emphasized. Most of the existing aircraft recovery models do not cover disrupted passengers clearly. We have developed an Ant Colony (ACO) algorithm to solve aircraft recovery while considering disrupted passengers as part of objective function cost. A heuristic function based on current and future disruptions is defined as visibility function in

our ACO algorithm. So ants will feel a stronger attraction to choose flights which are already disrupted or cause less disruptions. Therefore it prevents propagation of disruptions.

Other metaheuristics like as TS and GA have been just applied to aircraft recovery but not integrated recovery. Although computational results and comparison between these three metaheuristics in aircraft recovery and between ACO and INLP in integrated recovery indicate that our ACO algorithm is able to successfully handle airline recovery. Future studies can be done on using our ACO algorithm for other similar recovery problems. Furthermore using other metaheuristics approaches for integrated airline recovery problem can be useful.

Tab. 3. Results for simultaneous aircraft and passenger recovery for S1a

No	Weights					Solution Method	Time(s)	Objective Function Value	Results					
	CC	Ct	C	CD	Sp				c	st	s	d	it'_p	trn_p
1-1	20	100	10	1	10	INLP	83	1080	30	2	8	0	0	20
						ACO	20	1080	30	2	8	0	0	20
1-2	23	100	10	1	23	INLP	67	1425	30	2	8	225	0	10
						ACO	22	1425	30	2	8	225	0	10
2-1	20	1000	10	1	10	INLP	53	1160	46	0	4	0	0	20
						ACO	24	1160	46	0	4	0	0	20
2-2	23	1000	10	1	23	INLP	23	1553	46	0	4	225	0	10
						ACO	20	1573	46	0	6	225	0	10
3-1	100	1000	10	1	10	INLP	66	4820	32	0	0	1420	0	20
						ACO	23	4820	32	0	0	1420	0	20
3-2	100	1000	10	1	100	INLP	60	5845	32	0	0	1645	0	10
						ACO	26	5845	32	0	0	1645	0	10
4-1	100	100	10	1	10	INLP	49	3120	25	4	2	0	0	20
						ACO	25	3140	25	4	4	0	0	20
4-2	100	100	10	1	100	INLP	49	4145	25	4	2	225	0	10
						ACO	21	4145	25	4	2	225	0	10

Tab. 4. Results for simultaneous aircraft and passenger recovery for S1b

No	Weights					Solution Method	Time(s)	Objective Function Value	Results					
	CC	Ct	C	CD	Sp				c	st	s	d	it'_p	trn_p
1-1	20	100	10	1	10	INLP	71	270	0	0	12	0	0	15
						ACO	23	270	0	0	12	0	0	15
1-2	23	100	10	1	23	INLP	32	460	0	0	12	225	0	5
						ACO	20	480	0	0	14	225	0	5
2-1	20	100	100	1	10	INLP	77	800	0	0	4	250	0	15
						ACO	20	800	0	0	4	250	0	15
2-2	23	100	100	1	23	INLP	77	990	0	0	4	475	0	5
						ACO	21	990	0	0	4	475	0	5
3-1	20	100	400	1	10	INLP	20	1730	0	0	0	1580	0	15
						ACO	18	1730	0	0	0	1580	0	15
3-2	23	100	400	1	23	INLP	15	1920	0	0	0	1805	0	5
						ACO	17	1920	0	0	0	1805	0	5

References

- [1] Ball, M., Barnhart, C., G Nemhauser., Odoni, A., "Air Transportation: Irregular Operations and Control", 2006.
- [2] Kohl, N., Larsen, A., Larsen, J., Ross, A., Tiourine, S., "Airline Disruption Management: Perspectives, Experiences and Outlook", Journal of Air Transport Management, Vol. 13, 2007, pp. 149-162.
- [3] Filar, J.A., Manyem, P., White, K., "How Airlines and Airports Recover from Schedule Perturbations: A Survey", Annals of Operations Research, Vol. 108, 2001, pp. 315-333.
- [4] Bratu, S., Barnhart, C., "Flight Operations Recovery: New Approaches Considering passenger Recovery", Journal of Scheduling, Vol. 9, 2006, pp. 279-298.
- [5] Clausen, J., Larsen, A., Larsen, J., "Disruption Management in the Airline Industry- Concepts, Models and Methods", Informatics and Mathematical Modeling, Technical University of Denmark, 2005.
- [6] Yu, G., Qi, X., *Disruption Management: Framework, models and applications*: World Scientific Publishing Co.Pte.Ltd, 2004.
- [7] Kohl, N., Larsen, A., Larsen, J., Ross, A., Tiourine, S., "Airline Disruption Management: Perspectives, Experiences and Outlook", Project supported by CEC contract IST-1999-14049, 2004.
- [8] Andersson, T., Varbrand, P., "The Flight Perturbation Problem", Transportation Planning and Technology, Vol. 27, 2004, pp. 91-117.
- [9] Clarke, M.D.D., "Irregular Airline Operations: A Review of the State-of-the-Practice in Airline Operations Control Centers", Journal of Air Transport Management, Vol. 4, 1998, pp. 67-76.
- [10] Jafari, N., Zegordi, S.H., "Simultaneous Recovery Model for Aircraft and Passengers", To Appear in Journal of the Franklin Institute, 2010.
- [11] Jafari, N., Zegordi, S.H., "An Integrated Disruption Management Model for Aircraft and Passengers", Proceedings of the Third International Conference on Modeling, Simulation and Applied Optimization, Sharjah, U.A.E January 20-22, 2009.
- [12] Løve, M., Sørensen, K.R., Larsen, J., Clausen, J., "Using Heuristics to Solve the Dedicated Aircraft Recovery Problem", Informatics and Mathematical Modelling Technical University of Denmark, 2001.
- [13] Lučić, P., Teodorović, D., "Metaheuristics Approach to the Aircrew Rostering Problem", Annals of Operations Research, Vol. 155, 2007, pp. 311-338.
- [14] Andersson, T., "Solving the Flight Perturbation Problem with Meta Heuristics", Journal of Heuristics, Vol. 12, 2006, pp. 37-53.
- [15] Jingjie, Z., Qiushuang, C., Guohua, S., Qian, Z., "Disruption Scheduling of Airport Gate Based on Tabu Search Algorithm", presented at 26th Chinese Control Conference, Zhangjiajie, Hunan, China, 2007.
- [16] Guo, Y., "Decision Support Systems for Airline Crew Recovery", in Economics and Business Computing, Ph.D: University of Paderborn, 2005.
- [17] Dorigo, M., Maniezzo, V., Colomi, A., "The Ant System: an Autocatalytic Optimization Process", Technical report 91-016, Department of Electronics, Politecnico di Milano, Italy, 1991.
- [18] Gutjahr, W.J., Rauner, M.S., "An ACO Algorithm for a Dynamic Regional Nurse- Scheduling Problem in Austria", Computers & Operations Research, Vol. 34, 2007, pp. 642-666.
- [19] Seckiner, S.U., Kurt, M., "Ant Colony Optimization for the Job Rotation Scheduling Problem", Applied Mathematics and Computation, Vol. 201, 2008, pp. 149-160.
- [20] Dorigo, M., Stutzle, T., *Ant Colony Optimization*. MIT Press, Cambridge, MA, 2004.
- [21] Silva, C.A., Sousa, J.M.C., Runkler, T.A., "Rescheduling and Optimization of Logistic Processes using GA and ACO", Engineering Applications of Artificial Intelligence, Vol. 21, 2008, pp. 343-352